

**QUICK START GUIDE**

**MEDIAPAC CARTRIDGE**



Option 1

**MediaPac Bay Interface Kits**




**USB 2.0**



**PATA / IDE**

Your MediaPac Cartridge requires a MediaPac Cable or Bay Interface Kit to operate.

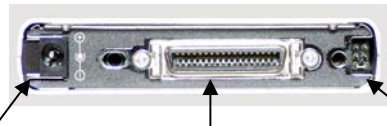

5VDC      Data / Power      Master/Slave

- The Interface cable carries both data and power.
- Connection of the 5VDC jack is not usually required when using the Interface cable.
- The master/slave jumper block is set correctly for cable and bay uses and will not need to be adjusted.
- Refer to your Interface Kit Quick Start Guide for connection, installation and operating instructions.

Option 2

**USB Interface Kit**



Option 3

**FireWire Interface Kit**



1430 Tully Road, Suite 416  
 San Jose, CA 95122  
 Phone: 408-947-8300  
 Fax: 408-947-8333  
 Email: info@audavi.com

**WWW.AUDAVI.COM**

©COPYRIGHT 2002-2009 AUDAVI CORPORATION.  
 ALL BRAND AND PRODUCT NAMES ARE REGISTERED TRADEMARKS  
 OF THEIR RESPECTIVE OWNERS.

**87053014A**



**SCSI**

50-Pin Narrow  
 68-Pin Wide